

# QUICKFITTING<sup>®</sup>

## SUREPRESS<sup>™</sup>

## PRESS · GREEN · GO


### QuickFitting<sup>®</sup> SurePress<sup>™</sup>

An innovative line of press fittings with a patented design that visually confirms a successful crimp.

Simply press the fitting,  
see green and go!

#### Indication Windows

Enables visual indication from every angle of the fitting

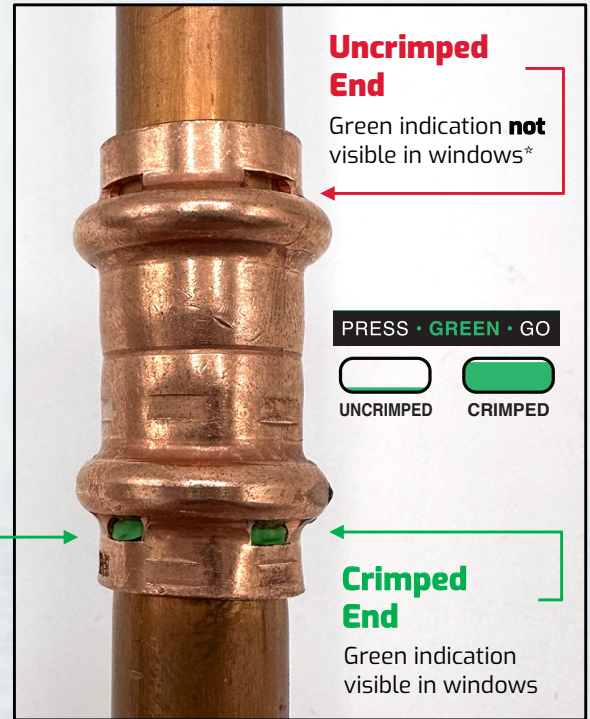

\* Green indication may show through windows prior to crimping. Once crimped, the green indication will expand, confirming a successful crimp.

## MISS ONE? SEE IT BEFORE IT LEAKS

The green indication that confirms a successful crimp is visible up to five feet away, allowing installers and inspectors to identify if a fitting has been pressed prior to pressure testing.

Save time and money with **QuickFitting<sup>®</sup> SurePress<sup>™</sup>**, the optimal choice for plumbing professionals.

[www.QuickFitting.com](http://www.QuickFitting.com)

QUICK FITTING HOLDING COMPANY, LLC.  
655 WATERMAN AVE., EAST PROVIDENCE, RI, USA 02914  
TEL: (877) 238-4826 / FAX: (877) 258-4826

LITSPS24

**Features and Benefits**

- Lead free
- Green indication in windows confirms crimp
- Compatible with ASTM B88 compliant 1/2" to 4" Type K, L, M hard copper tubing and 1/2" to 1-1/4" soft copper tubing
- U.S. Manufactured Grip Ring Technology
- Approved for hot/cold potable water applications
- Compatible with leading industry jaws and tools
- Limited Lifetime Warranty

**Materials**

- Body Construction: Copper
- Sealing Element: EPDM

**Performance**

- Maximum Working Pressure: 300 psi
- Operating Temperature: 0°F - 250°F
- Service: Hot & Cold Potable Water

**Codes and Listing**

- IAPMO/ANSI Z1117
- IAPMO/ANSI Z1157
- ASME B16.18
- ASME B16.22
- ASME B16.26
- NSF/ANSI 61
- NSF/ANSI 372



Product Type	Size	Part No.
Straight Coupling with Stop (P x P)	1/2"	SPWC11R
	3/4"	SPWC22R
	1"	SPWC33R
	3/4" x 1/2"	SPWRC21R
Straight Coupling no Stop (P x P)	1/2"	SPWC11NSR
	3/4"	SPWC22NSR
	1"	SPWC33NSR
Female Adapter (P x FNPT)	1/2"	SPWF11R
	3/4"	SPWF22R
Male Adapter (P x MNPT)	1/2"	SPWM11R
	3/4" x 1/2"	SPWM21R
Tee (P x P x P)	1/2"	SPWT111R
	3/4"	SPWT222R
	3/4" x 1/2" x 1/2"	SPWT211R
	3/4" x 1/2" x 3/4"	SPWT212R
	3/4" x 3/4" x 1/2"	SPWT221R
45-Degree Elbow (P x P)	1/2"	SPWE11-45R
	3/4"	SPWE22-45R
45-Degree Street Elbow (FTG x P)	1/2"	SPWE11-45STR
90-Degree Elbow (P x P)	1/2"	SPWE11R
	3/4"	SPWE22R
90-Degree Street Elbow (FTG x P)	1/2"	SPWE11-STR
	3/4"	SPWE22-STR
Cap (P)	1/2"	SPWEC1R
	3/4"	SPWEC2R
	1"	SPWEC3R
Reducer (FTG x P)	3/4" x 1/2"	SPWRC21-STR